





Model:168FHD
1080P WIFI Camera
User Manual


Product schematic

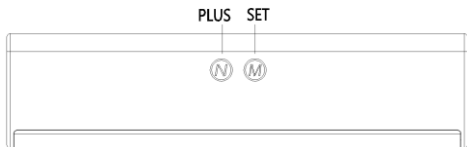


(6-1)

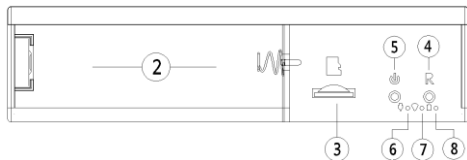

(6-2)

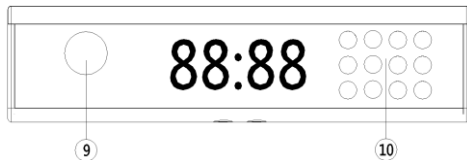

(6-3)



(6-4)

》 : Illustrate

- ① USB ② Battery ③ TF ④ SET ⑤ ON-OFF
- ⑥ Power Indicator ⑦ Function indicator
- ⑧ charging indicator ⑨ Camera ⑩ 940 LED ⑪ Speaker

(6-5)

》 : Function Keys

- ④ SET
 - * AP (Press 2-3 seconds)
 - * Restore factory settings (Press 8 seconds)
- ⑤ ON-OFF
 - * ON (Press 2-3 seconds)
 - * OFF (Press 4 seconds)
- ⑦ Function lamp
 - * Instruction -AP
 - * Indicator light flashes fast-WIFI
 - * Indicator light slow flash -Video status

(6-6)

1: Clock using the setup instructions


1.1 : Features

- ◇ Time display
- ◇ Press the "N" key Settings(24hrs-12hrs)

1.2 : Feature set


1.2.1 : the current time settings:

- ◇ Please press "M" button, The flashing, please set hours




" Then choose " N"key Settings.

- ◇ Press " M"key again, The flashing, please Set minutes




" Then choose " N"key Settings.

Hour Set



Minute set



- ◇ Press "M" time to exit.

2: Instruction for Wifi Camera


2.1: Download smart phone APP



APP:Camwf

2.1.1 : Use smart phone scan QR code or go to APP store to download APP(see first page).Scan RC code to download the corresponding APP.

SEE: (14-1)



(14-1)

2.1.2 : IOS system phone please go to Apple APP Store, search 【 Camwf 】 to download software , Please allow location when

installing.

2.1.3 : Android system phone please go to Google Play Store, search【 Camwf 】to download software ,Please allow location when installing.

2.1.4 : The default user name : **admin** password : **888888**

2.2 : Instruction of camera

2.2.1 : Open APP: Camwf. Accurate positioning takes 30-60 seconds, please do not exit the phone backstage system when When the phone APP gets positioned. SEE: (14-2)




Camwf
(14-2)


2.2.2 : Please take out the camera and plug in the USB adapter power on. Camera starts working, please wait for 40 seconds.

2.2.3 : Open phone WIFI setting, choose the WIFI that named with (RT-*****), click connect , SEE : (14-3)




(14-3)

2.2.4 : OPEN APP : Camwf , click top right corner  . SEE: (14-4)

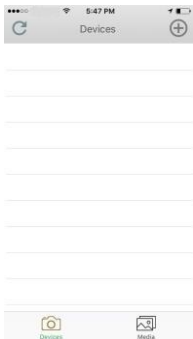

(14-4)

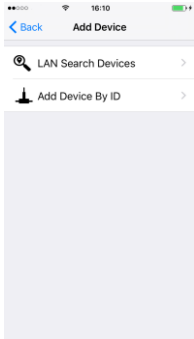

(14-5)

2.2.5 : Choose“LAN Search Devices “ click OK.SEE: (14-5) (14-6)



(14-6)



(14-7)

2.2.6 : Click the add in camera to view the surveillance video.



(14-8)




(14-9)




2.2.7 : The camera sets the SSID step , click “ ” choose “Network Settings” , searching WIFI……wait 3-5seconds,

click "SEE: (14-8) (14-10) (14-11)

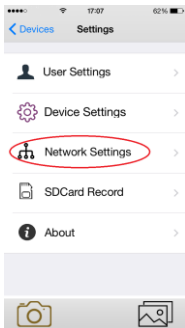


(14-10)

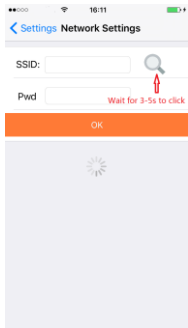

(14-11)

2.2.8 : Choose SSID, then click OK, enter the corresponding SSID password, click OK., and wait for the camera to match WIFI. Please wait for 30 seconds.....SEE: (14-12)



TP-LINK_111111
ChinaNet-SRdK
zhemindianzi
D-Link_DIR-601

(14-12)

2.2.9 :When WIFI match successfully, the camera will show online. As below picture, click "🔄" refresh online status. See (14-13)



(14-13)

2.3: SD Card Record Set up:

After finished settings, please click Confirm. See (14-14)



(14-14)

3: Parameter of camera

Image sensor : sony 323 HD1080P 200W

Lens : F1.6 FOV:175degree Forca : 25cm~Infinity

Night vision LED : 8units 14μchip , non-luminance LED

Wireless : IEEE802.11 b/g/n

Wireless mode : AP mode/STA mode

PC WIFI video : 1080P 1920x1080

Mobile WIFI video : 1920x1080 , 1280x720 , 640x480

Storage media : Micro TF(2GB-128GB)

Compressed format: H.264 dual stream

SD video : Support boot video, automatic cycle recording

Support : Apple IOS、 Android APP , XP.Win7 computer version

Please download PC client

4. PC client download link

download URL



<http://www.mymitech.com/download.html>

THANKS YOU!!